

HandBook 2023







- 1. Plug in RV to main power OR switch on the generator
 - a.Main power will typically be a tower of sorts toward the rear of the lot this also will typically be near the water line as well as the sewer hole.
 - b. To turn on generator As needed when no power hook ups are available.
 - c. AC MUST BE TURNED OFF and then may be turned back on once the generator starts
 - d. Prime the generator by holding down the switch to the STOP side until the light turns red above the switch > release the switch > press down the START button until you hear the generator fire up it sounds a bit like an engine, you'll know when its on.
 - e.Flip Main Power switch light will turn red
 - f.Go ahead and switch the AC back on after about 30 seconds and set to whatever temp you want.
- 2. Flip Main Power switch light will turn red as shown above
- 3. Turn power step off this keeps the steps down instead of having them constantly retract and then descend when you open and close the door. They will automatically go up when the ignition is started as a safety.
- 4. Turn off engine remove key from ignition. (everything should continue to run)
- 5. Make sure vents are open on overhead unit in RV
- 6. Make sure the two fridge lights are bold solid colors orange and green. Gas will cool the fridge faster, but will use your propane, auto uses either electric or gas electric when available, gas when not.
- 7. Hook up Hoses
 - a. Black tank (rubber gloves provided under the kitchen sink)
 - b.Drinking Water line

8. Level the RV

a.Place yellow Leveling blocks under the 4 jacks (Black Camco Bag in storage unit under stove outside) 2 up front, 2 in rear


b.Make sure slides are still in

- c.Press auto Level it will keep beeping until it is done. You'll see the jacks descend and adjust one by one, the unit may shake, that's normal. Once the beeping ends, it should be level
- 9. Open the slides
 - a. Front dining: slide 1
 - i. Press and hold EXT until fully out
 - b. Bedroom: slide 2
 - i. Press and hold EXT
- 10. Turn Propane tank handle to OPEN
- 11. Turn on Water heater gas is slightly faster, electric takes longer
 - a. (this will take at least an hour to fully heat up) not usually an issue in the Texas summer since the water doesn't get that cold anyways, but in the winter, this is critical!
- 12. Unpack and Enjoy!

PHOTOS FOR REFERENCE ON NEXT PAGE



Set Up

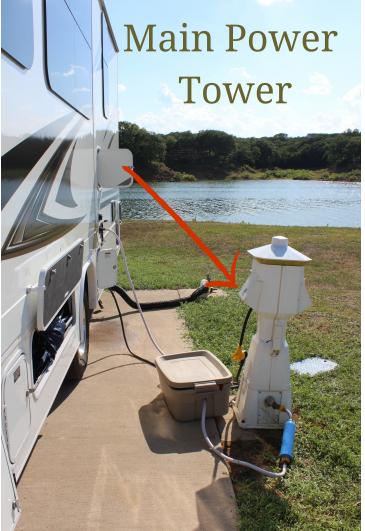



Main Power switch - ON





AC overhead vent

Fridge lights

Black tank hose on RV





drinking water





NOTICI of the driver's INVERTER ENERATOR START STOP SLIDE 6

Auto level button

Main Control Panel: slides generator



water heater tank guage tank heater

Please call Janine or Jay with any questions! 214-901-6844 I 817-673-1004